

THANK YOU!

Thank you for choosing this innovative Home Dehumidifier. We suggest that you keep this manual in a safe place for future reference. It explains the many benefits and advanced features this unique product has to offer. Before you use your new dehumidifier you should carefully read these instructions to maximise product performance.

For over 60 years Amcor has specialised in complete indoor environmental control; manufacturing and marketing dehumidifiers, portable air conditioners, coolers, air purifiers, ionisers and aroma therapy scent diffusers. These world class products incorporate the latest technological developments.

IMPORTANT SAFETY INSTRUCTIONS

Before any installation, use or maintenance operation, read the safety instructions in this manual carefully.

Remove all packaging materials from the unit. Keep all packaging away from babies and small children to avoid the danger of suffocation.

Before inserting the power plug, please make sure that the voltage is within the range indicated on the unit.

The dehumidifier is intended exclusively for the use for which it was created. Amcor is not responsible for any damage caused by improper use.

As with all electrical appliances, please use with care.

The first time that you use the unit please ensure that it has been standing for 2 hours in an upright position before it is switched on.

NOTE: The unit is not to be used in temperatures under 5 °C.

IMPORTANT!

- The unit is designed for indoor operation.
- Rating: This unit must be connected to a 220-240 V~ / 50Hz earthed outlet.
- The installation must be in accordance with regulations of the country where the unit is used.

If you are in any doubt about the electrical installation, have it checked and if necessary modified by a qualified electrician.

- Unplug when not in use. Do not unplug by pulling the cord.
- Do not operate this product with wet hands.
- Keep out of the reach of children.
- Do not clean the unit by spraying it or immersing it in water.
- Disconnect it from the mains before cleaning the unit or any of its components.
- Always unplug before changing the filter.
- Do not connect the unit to an electrical outlet using an extension cord. If an outlet is not available, one should be installed by a licensed electrician.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.

If the power cord is damaged, it must be replaced by an approved service representative or a similar qualified person in order to avoid any hazard.


Do not use your dehumidifier under the following conditions:



If the power cable wires are frayed or cut



When small children may be left unattended



On a slope or uneven surface




Close to a heat source



This product is not made for DIY repair




If there is a risk of liquid falling on the unit




Inside unit exposed to the weather outdoors



In a permanent very humid environment



If an extension lead is needed to reach an outlet



Where the power cable may be damaged



Where it may be damaged by chemicals



Where there is a risk of interference by foreign objects

PLACEMENT

Your AMCOR dehumidifier will begin to protect your home from the harmful effects of excessive moisture as soon as it is turned on.

Excess moisture travels throughout your home, in the same way cooking smells spread around the house. For this reason, the dehumidifier should be positioned in a central and clear location so that it can draw the moist air from all over the home. A warm hallway or landing is an excellent position for your dehumidifier. If possible, leave interior doors ajar to allow air circulation.

Alternatively, if you have a serious problem in one area you can begin by positioning the dehumidifier there and moving it to a more central location at a later date.

For the most effective use, run your dehumidifier with external doors and windows kept closed. Please note the unit should not be placed directly against a radiator or other heat source.


When positioning your AMCOR dehumidifier, ensure that it is placed securely on a level surface clear of any obstacle that may limit the air movement.

Your AMCOR dehumidifier is fitted with 4 wheels for easy movement. Before you move the unit, switch it off and empty the water tank.


IMPORTANT:

Keep a minimal 0.2 m safety distance between the appliance and an electrical heater or any inflammable surface.

PARTS

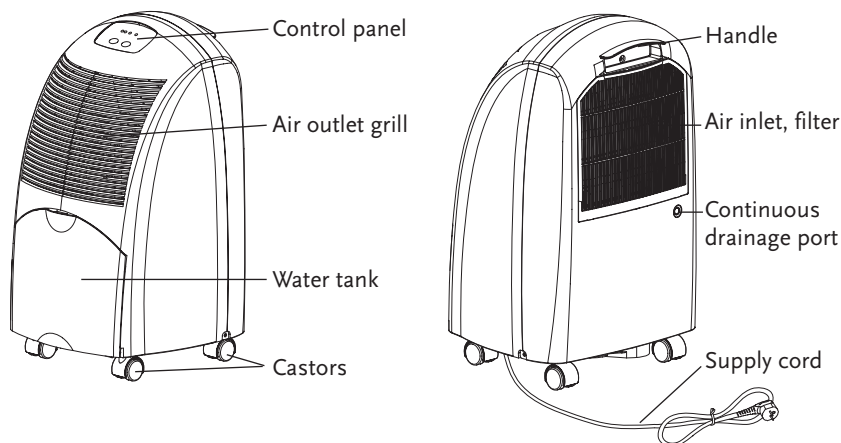

OPERATION

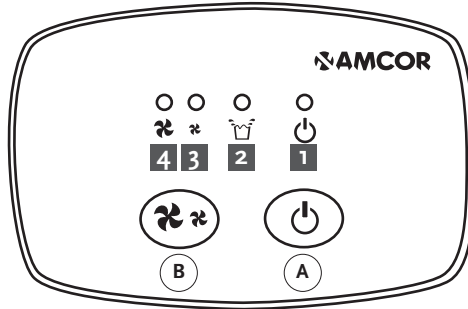

Switching the unit ON and Off

When the unit is plugged in, a buzzer will beep.

Press the ON/OFF button (A) to start the dehumidifier with the default low fan speed, LED [3] will light. When the room humidity is between 40% to 90%, the unit will dehumidify automatically and LED [1] will light.

The unit will stop dehumidifying when the relative humidity becomes lower than 40% or higher than 90%, LED [1] will go off, but the fan continues to circulate the air.

Press the power button (A) to switch the unit off.

Setting the fan speed

Press the FAN SPEED button (B) to change the desired fan speed, the high speed LED [4] or low speed LED [3] will light accordingly.

When the dehumidifier is running in room temperatures between 5 °C and 12 °C, it will stop operating every 30 minutes to defrost.

In room temperatures between 12 °C and 20 °C, the dehumidifier will stop to defrost every 45 minutes.

ROUTINE SERVICE AND CLEANING

Always unplug the unit from the mains before carrying out any maintenance or cleaning the unit.

Cleaning the body

Use only a soft cloth to wipe the unit clean.


Do not use volatile chemicals, petrol, detergents, chemically treated cloths or other harmful cleansing solutions. These could cause damage to the unit.

Cleaning the washable air filter

This dehumidifier is equipped with a washable filter. This will capture most airborne pollutants like dust, smoke, animal dander, mould spores and pollen to create a less irritating living environment.

It is advisable to check the filter on a regular basis (at least monthly and after storage) and clean as necessary:

- Extract the filter holder
- Use a vacuum cleaner or tap the filter lightly.



If the filter is particularly dirty, use lukewarm water with a small amount of detergent and rinse thoroughly under the cold water tap.

Make sure the filter is completely dry before replacing.

Do not expose the filter to sunlight or other sources of direct heat as this may cause the filter and frame to warp.

STORAGE


When the unit is not being used for long period of time and you want to store it, note the following steps:

1. Empty any water left in the water tank.
2. Fold up the power supply cord and put it in the water tank.
3. Clean the air filter.
4. Store in a cool and dry place.

EMPTYING THE WATER TANK

When the water tank is full, the unit will switch off automatically and beep 15 times, the LED [2] will light up.

- hold the top and bottom centre of the tank with both hands and pull it out gently.
- after having emptied the tank, gently push the tank back into its place. The LED light will go off.




Warning:

1. Do not remove the float from the water tank. The tank full sensor will no longer be able to detect the water level correctly without the float and water may leak from the water tank.
2. If the tank is dirty, wash it with cold or lukewarm water. Do not use detergent, scouring pads, chemically treated dust cloths, gasoline, benzene, thinner, or other solvents, as these can scratch and damage the tank and cause water leakage.
3. When replacing the drainage tank, press the tank firmly into place with both hands. If the tank is not positioned properly, the "TANK FULL" sensor will be activated, and the dehumidifier will not operate.

CONTINUOUS DRAINAGE

For the continuous drainage please follow these instructions:

1. Switch off the unit and remove the plug from the electrical outlet.
2. Remove the rubber stopper.
3. Connect a drain tube (10 mm inner diameter) on the drainage port.
4. Place the other end in a drain. Make sure the tube is free from twists and bends.



Note: The water tank must always be in place, even during continuous drainage.

TROUBLE SHOOTING

Never try to repair or dismantle the unit yourself. Before calling for assistance, please check the points below.		
Problem	Possible cause	Solution
The unit does not operate.	Has the power cord been disconnected?	Plug the power cord in a working outlet.
	Is the water tank full indicator flashing? The tank is full and/or in a wrong position.	Empty the water tank and position correctly.
	Is the room temperature above 35 °C or below 5 °C?	The protective device is activated, the unit can not be started.
The dehumidifying function does not work.	Is the air filter clogged?	Clean the filter as instructed under "Cleaning".
	Is the air inlet or air outlet obstructed?	Remove any obstacle.
No air is discharged.	Is the air filter clogged?	Clean the filter as instructed under "Cleaning".
Operation is noisy.	Is the unit tilted or unsteady?	Move the unit to a stable, sturdy location.
	Is the air filter clogged?	Clean the filter as instructed under "Cleaning".

TECHNICAL DATA

Model		AD12
Power supply		220 - 240 V~ / 50 Hz
Power consumption	W	235
Dehumidifying capacity - at 30°C, 90% RH	L/24h	12
Working temperature	°C	5 - 35
Refrigerant R134a*	g	150
Dimensions W x D x H	mm	291 x 264 x 476
Net weight	kg	9.5
Conform: EN 60335-1, EN 60335-2-40 Due to our continuous R&D programme, specifications may change without prior notice. For current specifications please refer to the rating label on your appliance. * (EC) No 842/2006: R134a is a fluorinated greenhousegas covered by the Kyoto Protocol. Its global warming potential (GWP) is 1300.		



Reminder:

Waste electrical products must not be disposed of with household waste. This product should be taken to your local recycling centre for safe treatment.

AMCOR UK SUPPORT

Please, for your own convenience, make these simple checks before calling the service line.

1. Has the unit been standing upright? (for at least 2 hrs)
2. Is the unit plugged into the mains? Is the fuse OK?
3. Switch the unit on and wait three minutes to see if the issue is resolved.
4. Check whether the water tank is full.

If the unit still fails to operate call: 0871 620 1057 or fill the online form

Office hours: 9AM - 5PM Monday to Friday

www.amcoruk.com

Unit 2, The Nursery, Berristow Lane, South Normanton, Derbyshire, DE55 2FX